

# **MONITORING REPORT**

## CARBON OFFSET UNIT (CoU) PROJECT



Title	:	2.1 MW Small Scale Wind Power Project by M/s Texwin Spinning Private Limited.
Version	:	1.0
MR Date	:	17/01/2023
First CoU Issuance Period	:	10 Months
First Monitoring Duration	:	30/03/2022 to 31/12/2022



# **Monitoring Report (MR)**

## CARBON OFFSET UNIT (CoU) PROJECT

<b>BASIC INFORMATION</b>			
Title of the project activity	2.1 MW Small Scale Wind Power Project by M/s Texwin Spinning Private Limited		
UCR Project Registration Number	228		
Version	1.0		
Completion date of the MR	17/01/2023		
Monitoring period number and	Monitoring Period Number: 01		
duration of this monitoring period	Duration of this monitoring Period: (first and last days included (30/03/2022 to 31/12/2022)		
Project participants	Creduce Technologies Private Limited (Aggregator) M/s Texwin Spinning Private Limited (Project Owner)		
Host Party	India		
Applied methodologies and standardized baselines	<b>d</b> Applied Baseline Methodology: AMS-I. D: "Grid connected renewable electricity generation", version 18		
Sectoral Scope	01 Energy industries (Renewable/Non-Renewable Sources)		
EstimatedamountofGHGemissionreductionsforthismonitoring period	<b>2022</b> : 3,680 CoUs (3,680 tCO <sub>2</sub> e)		
Total:	3,680 CoUs (3,680 tCO <sub>2</sub> e)		

## **SECTION - A - Description of project activity**

#### A.1 Purpose and General description of Carbon offset Unit (CoU) project activity

The proposed project activity with title under UCR "2.1 MW Small Scale Wind Power Project by M/s Texwin Spinning Private Limited" (Herein after called as project proponent 'PP') in Gujarat is a grid-connected renewable power generation activity which incorporates the installation and operation of single wind turbine generators (WTG) having capacity 2.1 MW, manufactured and supplied by Suzlon Energy Ltd. in the district Devbhumi Dwarka of the state of Gujarat in India. The project is an operational activity with continuous reduction of GHG, currently being applied under "Universal Carbon Registry" (UCR).

#### A.1.1 Purpose of the project activity:

The project activity aims to harness the kinetic energy of wind (a renewable source) to generate electricity. The net generated electricity from the project activity is used for captive consumption. A wheeling agreement is signed between Paschim Gujarat Vij Company Ltd. (PGVCL) and PP. Currently, the grid is connected to large numbers of fossil fuel-based power plants. Hence, project activity is displacing the gross electricity generation i.e., 4,089.5 MWh from the grid, which otherwise would have been imported from the grid.

The WTG under the project activity was commissioned by Gujarat Energy Development Agency (GEDA), Government of Gujarat, India as per below Table:

Unit	Capacity of WTG	Commissioning date	WTG ID no	District
Unit-I	2.1 MW	30/03/2022	SEL/2100/21-22/6582	Devbhumi Dwarka

The project activity doesn't involve any GHG emission sources. The annual and the total  $CO_2e$  emission reduction by the project activity over the defined monitoring period is as per **Annexure I**.

#### A.1.2 Description of the installed technology and equipment:

The project activity involves single WTG having a capacity of 2.1 MW manufactured and supplied by Suzlon Energy Ltd. The average life of the generator is around 20 years as per the equipment supplier's specification. The other salient features of the technology are:

The wind turbine is used to produce electricity using the kinetic energy of the wind. This is transformed into electrical energy using wind turbines or wind energy conversion systems. Wind first hits a turbine's blades, causing them to rotate and turn the turbine connected to them. That changes the kinetic energy to rotational energy, by moving a shaft which is connected to a generator, and thereby producing electrical energy through electromagnetism.

Below is a description of the different components of a WTG

1. **Main Tower:** The main support tower is made of steel, finished in a number of layers of protective paint to shield it against the elements. The tower is tall enough to ensure the rotor blade does not

interfere with normal day-to-day operations at ground level.

- 2. **Rotor Blades:** The rotor blades are the three (usually three) long thin blades that attach to the hub of the nacelle. These blades are designed to capture the kinetic energy in the wind as it passes, and convert it into rotational energy.
- 3. **Nacelle:** The nacelle is the 'head' of the wind turbine, and it is mounted on top of the support tower. The rotor blade assembly is attached to the front of the nacelle. It contains all the major parts of the WEG.
- 4. **Hub:** The hub of the wind turbine is the component that connects the blades to the main shaft and ultimately to the rest of the tower. The hub transmits and withstands all the loads generated by the blades.
- 5. **Main Shaft:** It is a piece of metal in the form of a tube that constitutes the most important spinning constituent since it conveys the energy from the wind turbine blades to the other parts of the wind turbine.
- 6. **Gear Box:** A gearbox is often used in a wind turbine to increase the rotational speed from a lowspeed main shaft to a high-speed shaft connecting with an electrical generator. Gears in wind turbine gearboxes are subjected to severe cyclic loading due to variable wind loads that are stochastic in nature.
- 7. **Brake:** A wind turbine rotor brake is a brake placed next to the gearbox that reduces the rotational speed of the blade assembly, fixes the blade so that it does not rotate in the case of power transmission maintenance or power generator rest, and in an emergency.
- 8. **Turbine generator:** The turbine generator is the component that turns the rotational energy in the high-speed output shaft from the gearbox into an electrical current. The electrical principle of electromagnetic induction shows that while a magnet is moving past a coil of wire, an electric current is created (or "induced") in the wire.

# A.1.3 Relevant dates for the project activity (e.g., construction, commissioning, continued operation periods, etc.)

The duration of the crediting period corresponding to the monitoring period is covered in this monitoring report.

UCR project Id	:	228
Start date of crediting period	:	30/03/2022
The project was commissioned on	:	30/03/2022

# A.1.4 Total GHG emission reductions achieved or net anthropogenic GHG removals by sinks achieved in this monitoring period

The total GHG emission reductions achieved in this monitoring period are as follows:

Summary of the Project Activity and ERs Generated for the Monitoring Period				
Start date of this Monitoring Period	30/03/2022			
Carbon credits claimed up to	31/12/2022			
Total ERs generated (tCO <sub>2</sub> e)	3,680 tCO <sub>2</sub> e			

Leakage Emission	0
Project Emission	0

#### A.1.5 Baseline Scenario

As per the approved consolidated methodology AMS-I.D. Version 18, if the project activity is the installation of a new grid-connected renewable power plant/unit, the baseline scenario is the following: "The baseline scenario is that the electricity delivered to the grid by the project activity would have otherwise, been generated by the operation of grid-connected power plants and by the addition of new generation sources into the grid".

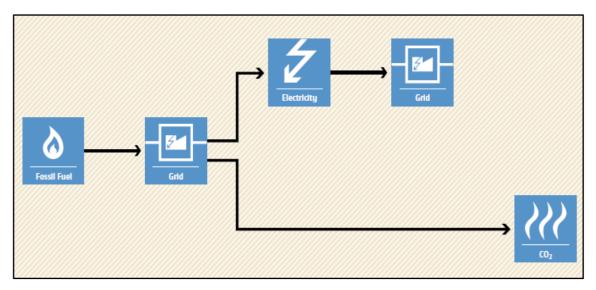



Figure 1 Baseline Scenario


## A.2 Location of Project Activity

The project location is situated at Devbhumi Dwarka district in the state of Gujarat. The project site is well connected by district and village roads to the nearest town. The geographic co-ordinates of the project locations have been provided below.

WTG	Latitude and Longitude	Village	District
2.1 MW	22°03'24.4"N 69°41'38.1"E	Sutariya	Devbhumi Dwarka

The representative location map is included below:

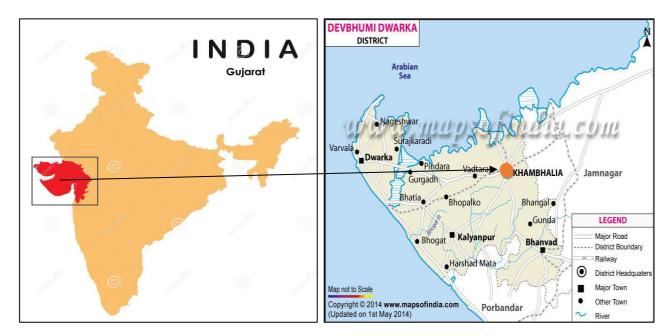



## A.3 Parties and project participants

Party (Host)	Participants
India	Creduce Technologies Private Limited (Aggregator)
	Contact person : Shailendra Singh Rao
	<b>Mobile</b> : +91 9016850742, 9601378723
	Address : 2-O-13,14 Housing Board Colony,
	Banswara, Rajasthan -327001, India
	M/s Texwin Spinning Private Limited (Developer)
	Address: "Vraj" Ground Floor, 5-Gunatit Nagar, B/h. Raiya Tele Exchange, 150 Ft Ring Road, Rajkot (Gujarat), India

## A.4 Methodologies and standardized baselines

Sectoral scope	:	01 Energy industries (renewable/non-renewable sources)
Туре	:	Renewable energy projects
Category	:	AMS-I.D: "Grid connected renewable electricity generation", Version 18

## A.5 Crediting period of project activity

Start date of the crediting period: 30/03/2022

Crediting period corresponding to this monitoring period: 30/03/2022 to 31/12/2022 (both dates are inclusive)

# A.6 Contact information of responsible persons/entities

<b>Contact person</b>	:	Shailendra Singh Rao	
Mobile	:	+91 9016850742, 9601378723	
Address	:	2-O-13,14 Housing Board Colony,	
	Banswara, Rajasthan -327001, India		

# **SECTION - B - Implementation of project activity**

## **B.1** Description of implemented registered project activity

# **B.1.1** Provide information on the implementation status of the project activity during this monitoring period in accordance with UCR PCN

The project consists of WTG with a capacity of 2.1 MW which was implemented and commissioned by the Gujarat Energy Development Agency (GEDA), Government of Gujarat at district Devbhumi Dwarka, Gujarat. M/s Texwin Spinning Private Limited is the owner of this project. The project generates clean energy by utilizing the kinetic energy of wind.

# **B.1.2** For the description of the installed technology, technical process, and equipment, include diagrams, where appropriate

The proposed project activity is installation and operation of single WTG manufactured and supplied by Suzlon Energy ltd with installed capacity of 2.1 MW in the state of Gujarat state of India.

Turbine model	Suzlon S111 DFIG 2.1 MW – IEC S (Based on IEC IIIA)
Rated power	2.1 MW
Rotor diameter	111.80 m
Tower Height	118.10 m
Hub height	120 m
Turbine Type	Hybrid Lattice Tower (HLT)
Cut in wind speed	3.0 m/s
Rated wind speed	12.5 m/s
Cut-out Wind speed	21 m/s
Generator Frequency	50 Hz
Generator type	Asynchronous 3 phase induction generator with slip ring operated with rotor circuit inverter system (DFIG)
Blade/Length	SB54/54.6 m

Technical details for WTG provided by Suzlon Energy is as follows:

## **B.2** Do no harm or impact test of the project activity

There was no harm identified from the project and hence no mitigation measures are applicable.

**Rational:** as per 'Central Pollution Control Board (Ministry of Environment & Forests, Govt. of India)', the final document on the revised classification of Industrial Sectors under Red, Orange, Green and White Categories (07/03/2016), has been declared that wind project activity falls under the "White category". White Category projects/industries do not require any Environmental Clearance such as 'Consent to Operate' from PCB as such project does not lead to any negative environmental impacts. Additionally, as per Indian regulations, environmental and social impact assessment is not required for

wind projects.

The Government of India has stipulated the following indicators for sustainable development in the interim approval guidelines for such projects which are contributing to GHG mitigations. The Ministry of Environment, Forests & Climate Change, has stipulated economic, social, environmental, and technological well-being as the four indicators of sustainable development. It has been envisaged that the project shall contribute to sustainable development using the following ways:

**Social well-being:** The project would help in generating direct and indirect employment benefits accruing out of ancillary units for manufacturing towers for the erection of the wind turbine generator and for maintenance during the operation of the project activity. It will lead to the development of infrastructure around the project area in terms of improved road network etc. and will also directly contribute to the development of renewable infrastructure in the region.

**Environmental well-being:** The project utilizes wind energy for generating electricity which is a clean source of energy. The project activity will not generate any air pollution, wind pollution or solid waste to the environment which otherwise would have been generated through fossil fuels. Also, it will contribute to the reduction of GHG emissions. Thus, the project causes no negative impact on the surrounding environment contributing to environmental well-being.

**Economic well-being:** Being a renewable resource, using wind energy to generate electricity contributes to the conservation of precious natural resources. The project contributes to economic sustainability through the promotion of decentralization of economic power, leading to the diversification of the national energy supply, which is dominated by conventional fuel-based generating units. Locally, improvement in infrastructure will provide new opportunities for industries and economic activities to be set up in the area. Apart from getting better employment opportunities, the local people will get better prices for their land, thereby resulting in overall economic development.

**Technological well-being:** The project activity leads to the promotion of a 2.1 MW WTG in the region and will promote practice for small-scale industries to reduce the dependence on carbonintensive grid supply to meet the captive requirement of electrical energy and also increase energy availability and improve quality of power under the service area. Hence, the project leads to technological well-being.

SDG	Description
Goal 7	> The project activity has generated 4,089.5 MWh of clean energy,
	which with increased shared and will increase the affordability at a
	cheaper rate to end user.
	> The project activity will utilize wind energy (renewal resource) to
	generate power. The project activity will increase the share of
	renewable resource-based electricity to global mix of energy

## The project activity contributes to the following SDGs;

7 AFFORDABLE AND CLEAN ENERGY	consumption.
Goal 8	<ul><li>Decent work and economic growth.</li></ul>
<b>B</b> DECENT WORK AND ECONOMIC GROWTH	This project activity generates additional employment for skilled and unskilled, also the project situated in a remote area will provide
	employment opportunities to unskilled people from villages. Training on various aspects including safety, operational issues, and developing skill sets will also be provided to employees.
Goal 13	This 2.1 MW wind power project meets the SDG 13 goal by saving fossil fuel and producing clean energy.
13 ACTION	This project has avoided 3,680 tons of CO <sub>2</sub> emissions during this monitoring period.
	> SDG 13 on clean energy is closely related and complementary.
	In a greenfield project, electricity delivered to the grid by the project would have otherwise been generated by the operation of grid- connected power plants. Thereby the project activity reduces the dependence on fossil fuel-based generation units and as there are no associated emissions with this project it contributes to the reduction of greenhouse gases (GHG) emissions.


## **B.3 Baseline Emissions**

The baseline scenario identified at the MR stage of the project activity is:


In the absence of the project activity, the equivalent amount of electricity would have been imported from the grid, which is carbon intensive due to being predominantly sourced from fossil fuel-based power plants. Hence, the baseline scenario of the project activity is the grid-based electricity system, which is also the pre-project scenario.

Schematic diagram showing the baseline scenario:

## **Baseline Scenario**:

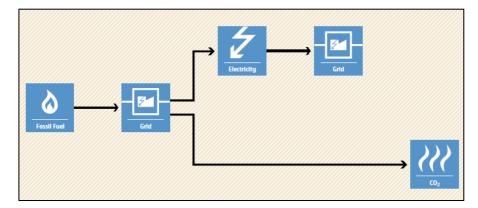

#### **Project Scenario:**

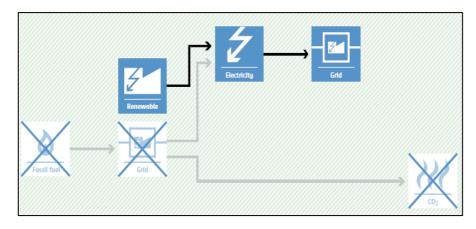

Thus, this project activity was a voluntary investment that replaced an equivalent amount of electricity from the Indian grid. The project proponent was not bound to incur this investment as it was not mandatory by national and sectoral policies. Thus, the continued operation of the project activity would continue to replace fossil fuel-based power plants and fight against the impacts of climate change. The PP hopes that revenues from the carbon credits generated will help repay the loans and help in the continued maintenance of this project activity.

#### **B.4.** De-bundling

This project activity is not a bundled component of a larger project activity.

## **SECTION - C - Application of methodologies and standardized baselines**

Sectoral scope	:	01, Energy industries (renewable/non-renewable sources)
Туре	:	I-Renewable energy projects
Category	:	AMS. I.D. (Title: "Grid connected renewable electricity generation", version 18)

#### C.1 References to methodologies and standardized baselines

#### C.2 Applicability of methodologies and standardized baselines

The project activity involves the generation of grid-connected electricity from the construction and operation of a new wind power-based project for captive consumption. A wheeling agreement is signed between Paschim Gujarat Vij Company Ltd. (PGVCL) and PP.

The project activity has an installed capacity of 2.1 MW which will qualify for a small-scale project activity under Type-I of the Small-Scale methodology. The project status is corresponding to the methodology AMS-I.D., version 18, and the applicability of the methodology is discussed below:

Applicability Criterion	Project Case
<ol> <li>This methodology comprises renewable energy generation units, such as photovoltaic, hydro, tidal/wave, wind, geothermal and renewable biomass:</li> <li>(a) Supplying electricity to a national or a regional grid; or</li> </ol>	The project activity is a Renewable Energy Project i.e., wind power project which falls under applicability criteria option 1 (b) i.e., "Supplying electricity for captive consumption."
(b) Supplying electricity to an identified consumer facility via national/regional grid through a contractual arrangement such as wheeling.	
<ul> <li>2. This methodology is applicable to project activities that:</li> <li>(a) Install a greenfield plant;</li> <li>(b) Involve a capacity addition in (an) existing plant(s);</li> <li>(c) Involve a retrofit of (an) existing plant(s);</li> <li>(d) Involve a rehabilitation of (an) existing plant(s)/unit(s); or</li> <li>(e) Involve a replacement of (an) existing plant(s).</li> </ul>	The option (a) of applicability criteria 2 is applicable as project is a greenfield plant /unit. Hence the project activity meets the given applicability criterion.

<ol> <li>Hydro power plants with reservoirs that satisfy at least one of the following conditions are eligible to apply this methodology:</li> </ol>	The project activity involves installation of WTG hence, this criterion is not applicable.
<ul><li>(a) The project activity is implemented in existing reservoir, with no change in the volume of the reservoir; or</li></ul>	
<ul> <li>(b) The project activity is implemented in existing reservoir, where the volume of the reservoir(s) is increased and the power density as per definitions given in the project emissions section, is greater than 4 W/m<sup>2</sup>.</li> </ul>	
(c) The project activity results in new reservoirs and the power density of the power plant, as per definitions given in the project emissions section, is greater than 4 W/m <sup>2</sup> .	
4. If the new unit has both renewable and non- renewable components (e.g., a wind/diesel unit), the eligibility limit of 15 MW for a small-scale CDM project activity applies only to the renewable component. If the new unit co-fires fossil fuel, the capacity of the entire unit shall not exceed the limit of 15 MW.	The proposed project is 2.1 MW wind power project, i.e. only component is renewable power project below 15MW, thus the criterion is not applicable to this project activity.
5. Combined heat and power (co-generation) systems are not eligible under this category	The project is wind power project and thus the criterion is not applicable to this project activity.
6. In the case of project activities that involve the capacity addition of renewable energy generation units at an existing renewable power generation facility, the added capacity of the units added by the project should be lower than 15 MW and should be physically distinct1 from the existing units.	The proposed project is a greenfield 2.1 MW wind power project, i.e., only component is renewable power project below 15 MW, thus the criterion is not applicable to this project activity.
7. In the case of retrofit, rehabilitation or replacement, to qualify as a small-scale project, the total output of the retrofitted, rehabilitated or replacement power plant/unit shall not exceed the limit of 15 MW.	The proposed project is a greenfield 2.1 MW wind power project, i.e., only component is renewable power project below 15 MW, thus the criterion is not applicable to this project activity.

8. In the case of landfill gas, waste gas, wastewater treatment and agro-industries projects, recovered methane emissions are eligible under a relevant Type III category. If the recovered methane is used for electricity generation for supply to a grid, then the baseline for the electricity component shall be in accordance with procedure prescribed under this methodology. If the recovered methane is used for heat generation or cogeneration other applicable Type-I methodologies such as "AMS-I.C.: Thermal energy production with or without electricity" shall be explored.	The proposed project is a greenfield 2.1 MW wind power project; hence, this criterion is not applicable to this project activity.
9. In case biomass is sourced from dedicated plantations, the applicability criteria in the tool "Project emissions from cultivation of biomass" shall apply.	No biomass is involved, the project is only a wind power project and thus the criterion is not applicable to this project activity.

## C.3 Applicability of double counting emission reductions

The project was not applied under any other GHG mechanism. Hence the project will not cause double accounting of carbon credits (i.e., CoUs).

#### C.4 Project boundary, sources, and greenhouse gases (GHGs)

As per applicable methodology AMS-I.D. Version 18, "The spatial extent of the project boundary includes the project power plant and all power plants connected physically to the electricity system." Thus, the project boundary includes the Wind Turbine Generator and the Indian grid system

	Source	Gas	Included?	Justification/Explanation
		$CO_2$	Yes	Main emission source
ine	Grid- connected	CH <sub>4</sub>	No	Minor emission source
Baseline	electricity	$N_2O$	No	Minor emission source
	generation	Other	No	No other GHG emissions were emitted from the project
Project	5 Greenfield		No	No CO <sub>2</sub> emissions are emitted from the project
Prc	Electric Power	CH <sub>4</sub>	No	Project activity does not emit CH <sub>4</sub>

S	Source	Gas	Included?	Justification/Explanation
	project Activity	$N_2O$	No	Project activity does not emit N <sub>2</sub> O
		Other	No	No other emissions are emitted from the project

#### C.5 Establishment and description of the baseline scenario

As per the approved consolidated methodology AMS-I.D. Version 18, if the project activity is the installation of a new grid-connected renewable power plant/unit, the baseline scenario is the following:

"The baseline scenario is that the electricity delivered to the grid by the project activity would have otherwise been generated by the operation of grid-connected power plants and by the addition of new generation sources into the grid".

The project activity involves setting up of a new WTG to harness the wind energy and use it for captive consumption i.e., the Indian grid system through wheeling and banking arrangement. In the absence of the project activity, the equivalent amount of power would have been generated by the operation of grid-connected fossil fuel-based power plants and by the addition of new fossil fuel-based generation sources into the grid. The power produced from other conventional sources which are predominantly fossil fuel-based. Hence, the baseline for the project activity is the equivalent amount of power produced at the Indian grid.

A "grid emission factor" refers to a CO<sub>2</sub> emission factor (tCO<sub>2</sub>/MWh) that will be associated with each unit of electricity provided by an electricity system. The UCR recommends an emission factor of 0.9 tCO<sub>2</sub>/MWh for the 2013 - 2020 years as a fairly conservative estimate for Indian projects not previously verified under any GHG program. Also, for the vintage 2021, the combined margin emission factor calculated from the CEA database in India results in higher emissions than the default value. Hence, the same emission factor has been considered to calculate the emission reduction under a conservative approach.

#### C.5.1 Net GHG Emission Reductions and Removals

Thus,  $ER_y = BE_y - PE_y - LE_y$ 

Where:

 $ER_y$  = Emission reductions in year y (tCO<sub>2</sub>/y)

 $BE_y$  = Baseline Emissions in year y (t CO<sub>2</sub>/y)

 $PE_y$  = Project emissions in year y (tCO<sub>2</sub>/y)

 $LE_y$  = Leakage emissions in year y (tCO<sub>2</sub>/y)

#### • Baseline Emissions

Baseline emissions include only  $CO_2$  emissions from electricity generation in power plants that are displaced due to the project activity. The methodology assumes that all project electricity generation

above baseline levels would have been generated by existing grid-connected power plants and the addition of new grid-connected power plants. The baseline emissions are to be calculated as follows:

$$BE_{y} = EG_{PJ,y} \times EF_{grid,y}$$
  

$$BE_{y} = Baseline \text{ emissions in year y (t CO_{2})}$$

$$EG_{PJ,y}$$
 = Quantity of net electricity generation that is produced and fed into the grid as a result of the implementation of the CDM project activity in year y (MWh)  
 $EF_{grid,y}$  = UCR recommended emission factor of 0.9 tCO<sub>2</sub>/MWh has been considered.  
(Reference: General Project Eligibility Criteria and Guidance, UCR Standard, page 4)

Hence,

	Baseline Emissions Calculation									
Sr.No	Year	Year EGpy (MWh) EFgrid,y BEy								
1	2022	4089.5	0.9	3680						
2	BE (tCO <sub>2</sub> e) for the period of 2022 $3,680$									

Estimated annual baseline emission reductions (BE<sub>y</sub>)

= 4,089.5 MWh/year \*0.9 tCO<sub>2</sub>/MWh

= 3,680 tCO<sub>2</sub>/year (i.e., 3,680 CoUs/year)

#### • Project Emissions

As per Paragraph 39 of AMS-I.D. version-18, only emissions associated with fossil fuel combustion, emissions from the operation of geothermal power plants due to the release of non-condensable gases, emissions from a water reservoir of hydro should be accounted for the project emission. Since the project activity is a wind energy project, project emission for renewable energy plants is nil.

Thus, PE = 0

#### • Leakage Emission

As per paragraph 42 of AMS-I.D. version-18, 'If the energy generating equipment is transferred from another activity, leakage is to be considered.' In the project activity, there is no transfer of energy-generating equipment and therefore the leakage from the project activity is considered zero.

#### Hence, LE = 0

The actual emission reduction achieved during the first CoU period is calculated below:

Hence Net GHG emission reduction, = 3,680-0-0 = 3,680 tCO<sub>2</sub>/year (i.e., 3,680 CoUs/year)

## C.6 Prior History

The project was not applied under any other GHG mechanism. Hence the project will not cause double accounting of carbon credits (i.e., CoUs).

## C.7 Changes to the start date of crediting

The crediting period under UCR has been considered from the date of the generation of electricity. There is no change in the start date of crediting period.

# C.8 Permanent changes from MR monitoring plan, applied methodology, or applied standardized baseline

Not applicable.

#### C.9 Monitoring period number and duration

Total Monitoring Period: 10 Months

Date: 30/03/2022 to 31/12/2022 (inclusive of both dates).

#### C.10 Monitoring Plan

The project activity essentially involves the generation of electricity from wind, and does not use any other fossil fuel for electricity generation, thus no special ways and means are required to monitor leakage from the project activity. The recording of the electricity fed to the state utility grid is carried out jointly at the incoming feeder of the state power utility (GETCO).

Data / Parameter	UCR recommended emission factor
Data unit	tCO <sub>2</sub> /MWh
Description	A "grid emission factor" refers to a CO <sub>2</sub> emission factor (tCO <sub>2</sub> /MWh) which will be associated with each unit of electricity provided by an electricity system. The UCR recommends an emission factor of 0.9 tCO <sub>2</sub> /MWh for the 2013 - 2020 years as a fairly conservative estimate for Indian projects not previously verified under any GHG program. Hence, the same emission factor has been considered to calculate the emission reduction under conservative approach.
Source of data	https://a23e347601d72166dcd6-
	16da518ed3035d35cf0439f1cdf449c9.ssl.cf2.rackcdn.com//Documents
	/UCRCoUStandardAug2022updatedVer6_090822220127104470.pdf
Value applied	0.9
Measurement	_
methods and	
procedures	
Monitoring frequency	Fixed parameter
Purpose of Data	For the calculation of Emission Factor of the grid
Additional Comment	The combined margin emission factor as per CEA database (current
	version 16, Year 2021) results into higher emission factor. Hence for

#### Data and Parameters available:

|--|

#### Data and Parameters to be monitored (ex-post monitoring values):

Data / Parameter	ECara in
	EGpJ,facility, y
Data unit	MWh
Description	Net electricity supplied to the grid facility by the project activity during $30/03/2022$ to $31/12/2022$ .
Source of data	SLDC Certificate/Energy Generation Report/Monthly Energy Invoices
Measurement	Data Type: Measured
procedures (if any):	Monitoring equipment: Energy meters are used for monitoring Recording Frequency: Continuous monitoring and monthly recording from energy meters, summarized Annually
	Archiving Policy: Paper & Electronic
	Calibration frequency: 5 years (as per CEA provision)
	The Net electricity generation by the WTG is recorded at the sub- station. At the end of every month, SLDC Certificate is generated based on the total monthly electricity exported to the grid.
Measurement Frequency:	Monthly
Value applied:	4,089.5 (Ex-post estimate)
QA/QC procedures	Continuous monitoring, hourly measurement monthly recording.
applied:	Tri-vector (TVM)/ABT energy meters with accuracy class 0.2s
Purpose of data:	The Data/Parameter is required to calculate the baseline emission.
Any comment:	Data will be archived electronically for a period of 36 months beyond the end of crediting period.

· · · ·		1	2.1 MW Sma	all Scale W	ind Power F	Project by N	1/s Texwin	Spinning Pi	ivate Limit	ed	· · · ·	
				Mon	th - Wise En	ergy Deliver	ed to Grid (i	n kWh)				
Year	Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov I								Dec			
2022			299	2,70,488	7,39,909	5,43,324	7,47,343	5,15,109	2,39,053	2,19,074	2,88,255	5,26,679
			Ye	ear-Wise En	nission redu	ction calcula	tion for the	project acti	vity			
Year Total No. of Electricity delivered in kWh Recommended emission factor tCO2/MWh Total CoUs generated												
2022 40,89,533 0.9							3,680					
Total CoUs to be issued for the first monitoring period (Year: 2022)								3,680				

## ANNEXURE I (Emission Reduction Calculation)